


Low-Loss Bandpass SAW Filter

- Central frequency **455 MHz**
- -2.5 dB bandwidth ($BW_{-2.5}$) **7.0 MHz**
- Minimum insertion loss **-1.6 dB**
- SMD package **3.8 x 3.8 mm²**

Typical measured response (S12)

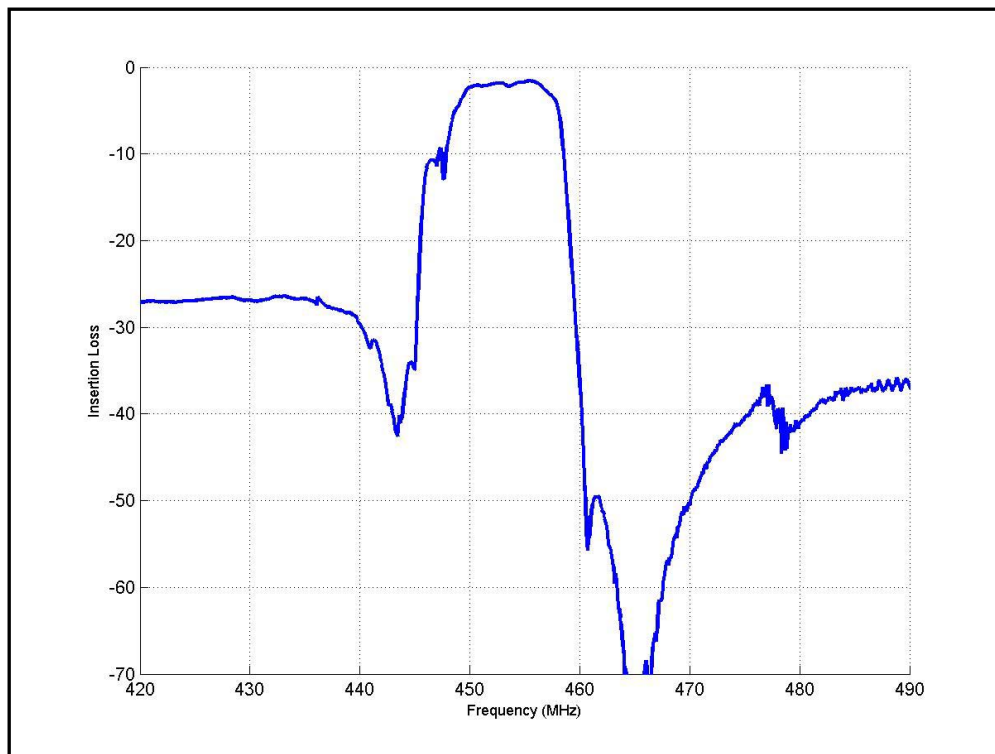

GVR Trade SA

victor.plessky@bluewin.ch