


2.45 GHz SAW RFID Tag

- Central frequency **2.45 GHz**
- Band (inside ISM band 2400 MHz - 2482 MHz) **40 MHz**
- 2 calibration reflectors
- 10 code reflectors
- 2 error control reflectors
- Total number of codes (without phase coding) > 1'000'000

FEM/BEM simulated response

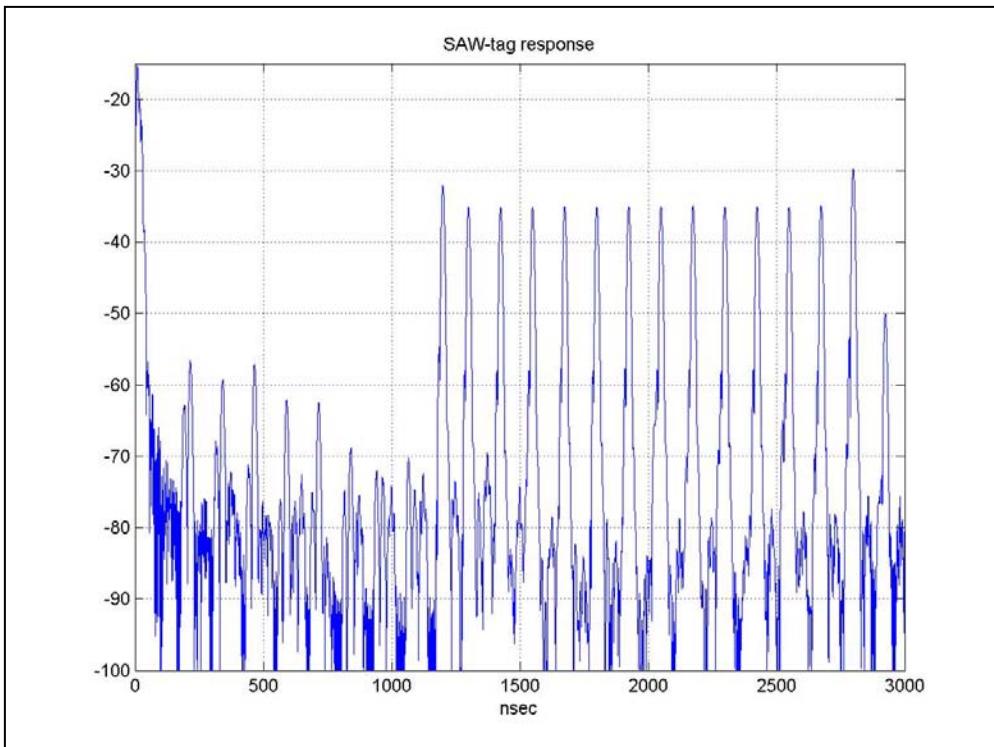

GVR Trade SA

victor.plessky@bluewin.ch